


# CBI485A Battery Charger



Input: Single-phase 115 ÷ 230 VAC

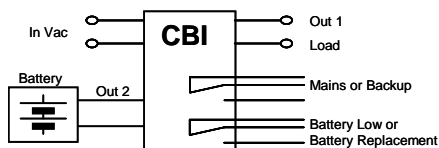

Output 1: Load power supply 48 VDC; 5 A

Output 2: Battery charging 48 VDC; 5 A

Suited for the following battery types: Open Lead Acid, Sealed Lead Acid, lead Gel and Ni-Cd (option)

Automatic diagnostic of battery status. Charging curve UI, constant voltage and constant current  
Battery Life Test function

Switching technology, output voltage 44-57,6VDC  
Three charging levels: Boost, Trickle and Recovery

Protected against short circuit and inverted polarity

Signal output (contact free) for discharged or damaged battery

Signal output (contact free) for mains or Back-UP

Protection degree IP20 - DIN rail or bracket mounting

## Technical features

The CBI series is a range of microprocessor control battery chargers able to optimize charging and discharging cycles while ensuring extended battery life. Boost and trickle charging are under micro-processor supervision. Continuous monitoring of battery efficiency reduces battery damage risk and allows a safe operation also in case of permanent connection. They are suited for several battery types, Open Lead Acid, Sealed Lead Acid, Lead Gel and Ni-Cd. They are programmed for two charging levels, boost and charge, but they can be changed to single charging level by the user. Suitable for recharging, supply and recharging, supply and Back-Up battery module. A rugged casing with bracket for DIN rail mounting provide IP20 protection degree

### Charging curve selection

By means of jumpers. Predefined curves for Open Lead Acid, Sealed Lead Acid, Gel, Ni-Cd(option) or Single charging level

### Type of Signal Output Contact

Maximum current can be switched: 1 A – 30 Vdc.

### Installation

The device must be installed according to EN 60950 norm, with a proper isolation switch.

### Norms and Certifications

Conforming with:  
IEC/EN 60335-2-29 Battery chargers  
EN60950 / UL1950 Electrical safety  
89/336/EEC EMC Directive  
93/68/EEC (Low Voltage)  
DIN41773 (Charging cycle)  
EN 61000-3-2 (Current harmonics).  
EN50082-2 level 3 criteria B (immunity to EMC interference)  
EN55011 Class B (Suppression of radio interference for industrial and residential environment)

### Climatic Data

Range of ambient working temperature	-10 ÷ +50°C
Range of ambient stocking temperature	-25 ÷ +85°C
Max. relative humidity, without condensation	95% to 25°C

### General Data

Insulation voltage (IN/OUT)	3000 Vac
Insulation voltage (input / ground)	1605 Vac
Insulation voltage Output / ground)	500 Vac
Protection degree	IP20
Protection class	I, with PE connected
Dimensions (w-h-d)	100x115x135 mm

### Input Data

Rated voltage	115 - 230 Vac
Voltage range	93 ÷ 264 Vac
Frequency	47 ÷ 63 Hz
Internal fuse (not replaceable)	Yes

### Output Data

Output Voltage (Vn) / Nominal Current (In)	48 Vdc / 5A
Minimum Load requirement	No
Efficiency (at 50% of rated current)	≥ 83 %
Short-circuit protection)	Yes
Over Load protection	Yes
Over Voltage Output protection	Yes

### Battery Output (Battery Type 3 - 50Ah)

Boost charge (25 °C) (at In)	57.6 Vdc
Trickle charge (25 °C) (at In)	55 Vdc
Output 2: Battery Charging current max I <sub>batt</sub>	5 A ± 5%
Setting range of charging current	20 ÷ 100 % of I <sub>n</sub>
Recovery Charge	Yes
Jumper Charging Configuration	Yes
Reverse battery protection	Yes
Sulfated battery check	Yes
Detection of element in short circuit	Yes

### Load Output

Output voltage (at In)	44 ÷ 57.6 Vdc
Max Nominal current . In= I <sub>load</sub> + I <sub>batt</sub> (120 W)	1.1 x 5 A ± 5%
Output 1: Load current (Main) I <sub>load</sub>	15 A max.
Output 1: Load current (Back Up) I <sub>load</sub>	10 A max.

### Signal Output (free switch contacts)

Main or Backup Power	Yes
Low Battery	Yes
Fault Battery	Yes

### Signal Input/Output (RJ45)

Temp. Comp. Battery (with external probe)	Option
Voltage drop compensation (with external cable)	Option
Remote monitoring display	Option